

Data Sheet

Low Power Driver LPD-2


Features

Drives arbitrary current waveforms into laser diodes
 CW, pulsed, modulated or mixed curves
 Short rise and fall time, no overshoot, no ripple
 Set-point adjustment: analog input and potentiometer
 Digital enable / trigger input



Specification

Diode current	0 mA ... 2000 mA
Diode voltage	max 23 V
Power dissipation	3.8 W max (no heatsink)
Power dissipation	15.6 W max (heatsink required)
Supply voltage	6.0 V ... 24.0 V, max. 26 V
Supply voltage min	diode voltage + 1 V
Supply current	2.05 A max
Rise time	< 3.5 μ s
Fall time	< 3.5 μ s
Frequency	50 kHz max (square wave)
Frequency	165 kHz max (sine wave, -3dB)
Accuracy	± 1 %
Linearity	± 1 %
Temperature stability	± 150 ppm / $^{\circ}$ C
Ripple	no ripple

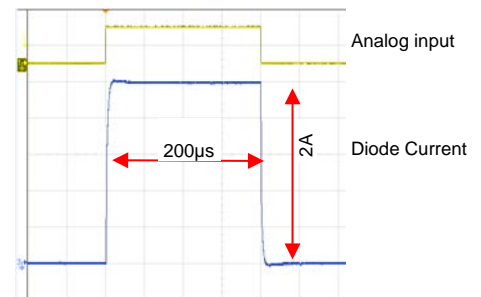

Inputs

Diode current set point	0 V ... 10 V (impedance: 2 k Ω)
Enable	TTL - low active (impedance: 1 k Ω)

Output

Diode current	Terminal
---------------	----------

General specifications

Ambient temperature	0 ... +45 $^{\circ}$ C
Dimensions	52 x 37 x 11 mm, with heat sink 105 x 50 x 39 mm
Weight	12 g, with heat sink 162 g

Description

Low power driver LPD-2 is a linear current source with excellent properties for driving low power laser diodes. Current waveforms can be CW, pulsed, modulated or a combination with frequencies up to 50 kHz (square wave) and currents up to 2 A. An analog modulation input and a digital enable / trigger input can generate fast and clean pulses. An analog input and a potentiometer control the current set point. Both values are added and build the effective current set point. LPD-2 is small and compact and can be operated without heatsink ($P_{DISS} < 3.8$ W). A heatsink is required for $P_{DISS} > 3.8$ W.

Technical subjects to change without notice.

Type	Description	Ordering code
LPD-2	Current Source	10100920
LPD-2-HSK	Heatsink Kit	10100921



Warning!
 Risk of exposure of hazardous laser radiation
 in combination with laser light emitting devices!

Document: 10100920	Revision: 01	Date: 14.11.2017
www.powerconverter.eu	info@powerconverter.eu	+49 (0) 8856 803060